


# REAR SPEAKER ASSY REPLACEMENT

670VM-01

## HINT:

- LOCATION: See page 67-1
  - COMPONENTS: See page 76-13
1. REMOVE REAR DOOR SCUFF PLATE RH (See page 76-15)
  2. REMOVE REAR DOOR SCUFF PLATE LH (See page 76-15)
  3. REMOVE REAR DOOR OPENING TRIM RH (See page 76-15)
  4. REMOVE REAR DOOR OPENING TRIM LH (See page 76-15)
  5. REMOVE BACK DOOR WEATHERSTRIP (See page 76-15)
  6. REMOVE SPARE WHEEL COVER ASSY (See page 76-15)
  7. REMOVE REAR SEATBELT ASSY (See page 61-14)
  8. REMOVE DECK TRIM COVER REAR (See page 76-15)
  9. REMOVE BENCH TYPE REAR SEAT BACK ASSY (See page 72-8)

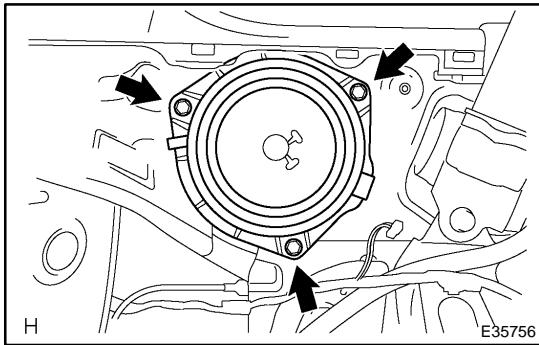

## 10. REMOVE REAR SPEAKER ASSY

- (a) Remove the 3 bolts and the rear speaker assy.
- (b) Disconnect the connector.

## 11. INSTALL REAR SPEAKER ASSY