


DISPOSAL

HINT:

Use the same procedures for the RH side and LH side.

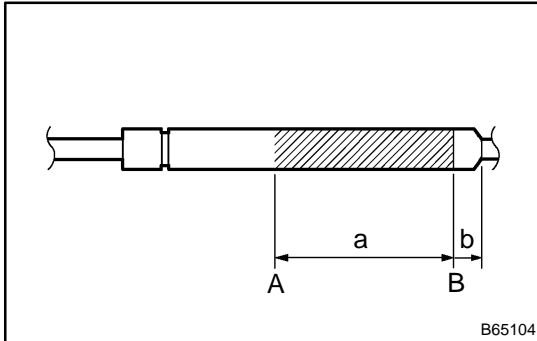

1. **DISPOSE OF BACK DOOR STAY SUB-ASSY LH**
 - (a) Horizontally fix the stay in a vise, with the piston-rod pulled out.
 - (b) Wearing safety glasses, gradually cut a part between A and B as shown in the illustration using a metal saw to gradually release the gas.

Specification:

Area	Measurement
a	80 mm (3.15 in.)
b	20 mm (0.80 in.)

NOTICE:

Be careful to cover the area that is being cut as there is a possibility that metal debris could be blown out by the gas (the gas is colorless, odorless and harmless).