

# ENGINE


## ON-VEHICLE INSPECTION

9900Y-12

### HINT:

Inspect these items on a cooled down engine.

1. **INSPECT DRIVE BELT (See page 14-5)**
2. **REPLACE SPARK PLUGS (See page 18-1)**

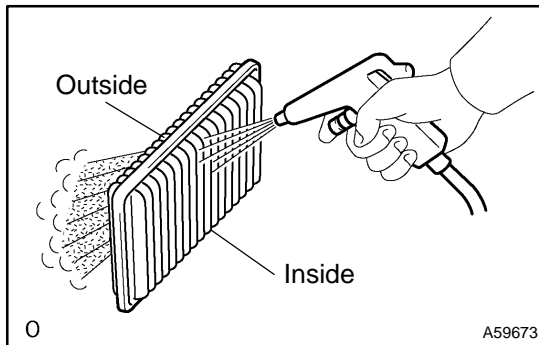

### 3. INSPECT AIR FILTER

- (a) Remove the air filter.
- (b) Visually check that the air filter is not excessively damaged, dirty or oily.

Replace the air filter if necessary.

- (c) Clean the filter with compressed air.  
First blow from the inside of the filter thoroughly then repeat from the outside.
- (d) Reinstall the air filter.

### 4. REPLACE AIR FILTER

- (a) Replace the air filter with a new one.

### 5. REPLACE ENGINE OIL AND OIL FILTER (See page 17-11)

### 6. REPLACE ENGINE COOLANT (See page 16-7)

### 7. INSPECT GASKET IN FUEL TANK CAP (See page 12-3)

### 8. INSPECT FUEL LINES AND CONNECTIONS, FUEL TANK VAPOR VENT SYSTEM HOSES AND FUEL TANK BANDS

- (a) Visually check the fuel lines for cracks, leakage, loose connections, deformation and tank band looseness.

### 9. INSPECT EXHAUST PIPES AND MOUNTINGS

- (a) Visually check the pipes, hangers and connections for severe corrosion, leaks and damage.

### 10. INSPECT VALVE CLEARANCE (See page 14-7)